

# AEDC

Arnold Engineering Development Center  
Arnold Air Force Base, Tenn. 37389

An Air Force Materiel Command Test Facility

*Understanding Tomorrow Today*

America's  
Air & Space  
Advantage




[www.arnold.af.mil](http://www.arnold.af.mil)

## Mark 1 Test Facility

The Mark I Test Facility is a state-of-the-art space environment simulation test chamber for full-scale space systems testing. A \$1.5M dollar upgrade in fiscal year 2000 replaced existing oil diffusion pumps with a complete dry pumping system, cleaned the interior of the chamber and refinished the surface the (LN<sub>2</sub>) thermal shroud. A new Hewlett Packard 3852, with 1,500 channels of data capability, replaced the previous Micro-Vax data system. These upgrades, combined with the sheer size of the facility, at 42 ft diameter by 82 ft, postures AEDC for future testing of full-scale satellites and other space systems requiring a contamination-free test environment.

### Capabilities:

Thermal	Chamber is completely lined with a liquid nitrogen shroud that can provide thermal conditions down to 77 degrees Kelvin.
Vacuum Range	≤ 5x10 <sup>-7</sup> Torr to local atmospheric pressure.
Working Volume	36 foot diameter x 70 foot tall.
Support Structure	200,000 pounds /12-foot-square seismic mass provides vibration isolated of test articles.
Pumping System	Mechanical roughing pumps, turbo molecular and cryogenic high vacuum pumps, all with cryogenic traps.
Loading	Vertical: 20-foot opening in top of chamber, via a 15-ton precision crane. Horizontal: 8-foot diameter manway in the chamber side near the bottom.
Cold Wall	Lined with 77 degrees Kelvin liquid nitrogen, cryogenic shroud.
Special Features	Laminar flow optical quality clean room (400 square foot, better than Class 1000). 15-ton precision crane.
Data	All facility data time tagged and archived. 1,500 channel test data system available.
Work Areas	Test customer offices available. Limited hardware storage available. Two large bay areas available for test article build-up.
Solar Simulation	Infrared lamp arrays available for thermal cycling.
Other	15 degrees Kelvin gaseous helium cryopumping capability available.
Contact	W. Hunter Vaughn (931)454-6650 <a href="mailto:hunter.vaughn@arnold.af.mil">hunter.vaughn@arnold.af.mil</a>

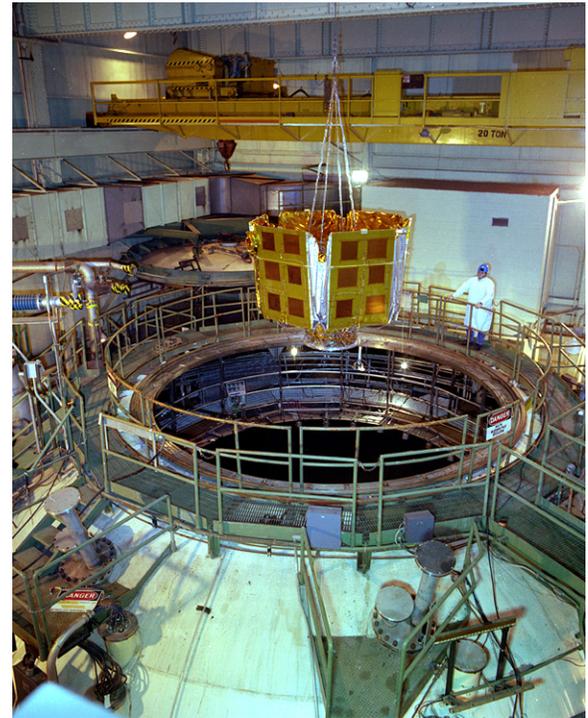

A Map Test in Mark I

Photo # 00-04407



AEDC Public Affairs • 100 Kindel Drive, Suite B-213 • Arnold AFB, TN 37389-2213  
(931) 454-5586 • DSN (931) 340-5586

For information on AEDC visit our Web site at [www.arnold.af.mil](http://www.arnold.af.mil)

Release 2002-325